




Image Sensor	640 × 480 (× 2) Resolution	120 Hz Native Frame Rate	8.3 ms Latency
Tracking Performance & Range¹	3D Accuracy +/- 0.50 mm	Passive Markers 6 m (20')	Active Markers Not active capable
Global Shutter	Default Speed 1 ms	Minimum Speed 0.01 ms	
Image Processing Types	Segment Raw Grayscale	Precision Grayscale MJPEG Grayscale	
Connections	USB 2.0 data port	IO-X camera sync	12V @ 3A power
Lens & Filter	Stock Lens 47° × 43° FOV		
LED Ring	26 LEDs (× 2) 850nm Infrared	Strobe Mode Intensity control	

Size & Weight

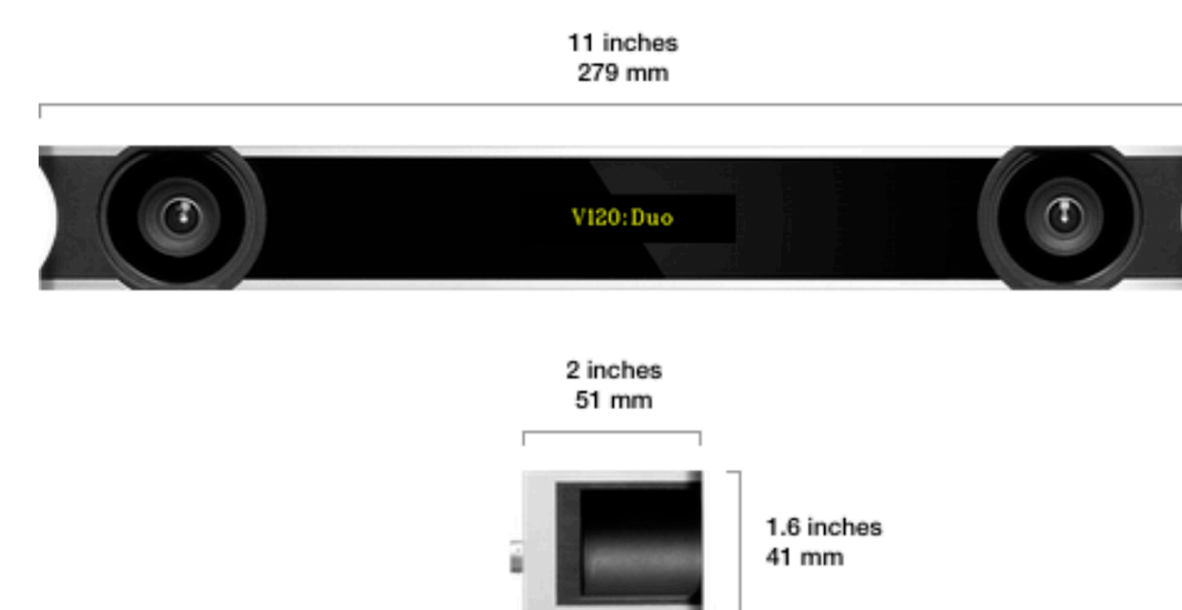

Width

11 inches (27.94 cm)

Height

1.6 inches (4.06 cm)

Depth

2 inches (5.08 cm)

Weight

1.3 pounds (0.6 kg)

Camera Body

Aluminum	1/4"-20 Standard Tripod Mount
128 × 22 OLED status indicator	LED health and activity indicator