




<b>Image Sensor</b>	640 × 480 (× 3) Resolution	120 Hz Native Frame Rate	8.3 ms Latency
<b>Tracking Performance &amp; Range<sup>1</sup></b>	3D Accuracy +/- 0.50 mm	Passive Markers 6 m (20')	Active Markers Not active capable
<b>Global Shutter</b>	Default Speed 1 ms	Minimum Speed 0.01 ms	
<b>Image Processing Types</b>	Segment Raw Grayscale	Precision Grayscale MJPEG Grayscale	
<b>Connections</b>	USB 2.0 data port	IO-X camera sync	12V @ 3A power
<b>Lens &amp; Filter</b>	Stock Lens 47° × 43° FOV	Filter Switcher Optional	
<b>LED Ring</b>	26 LEDs (× 3) 850nm Infrared	Strobe Mode Intensity control	

**Size & Weight**

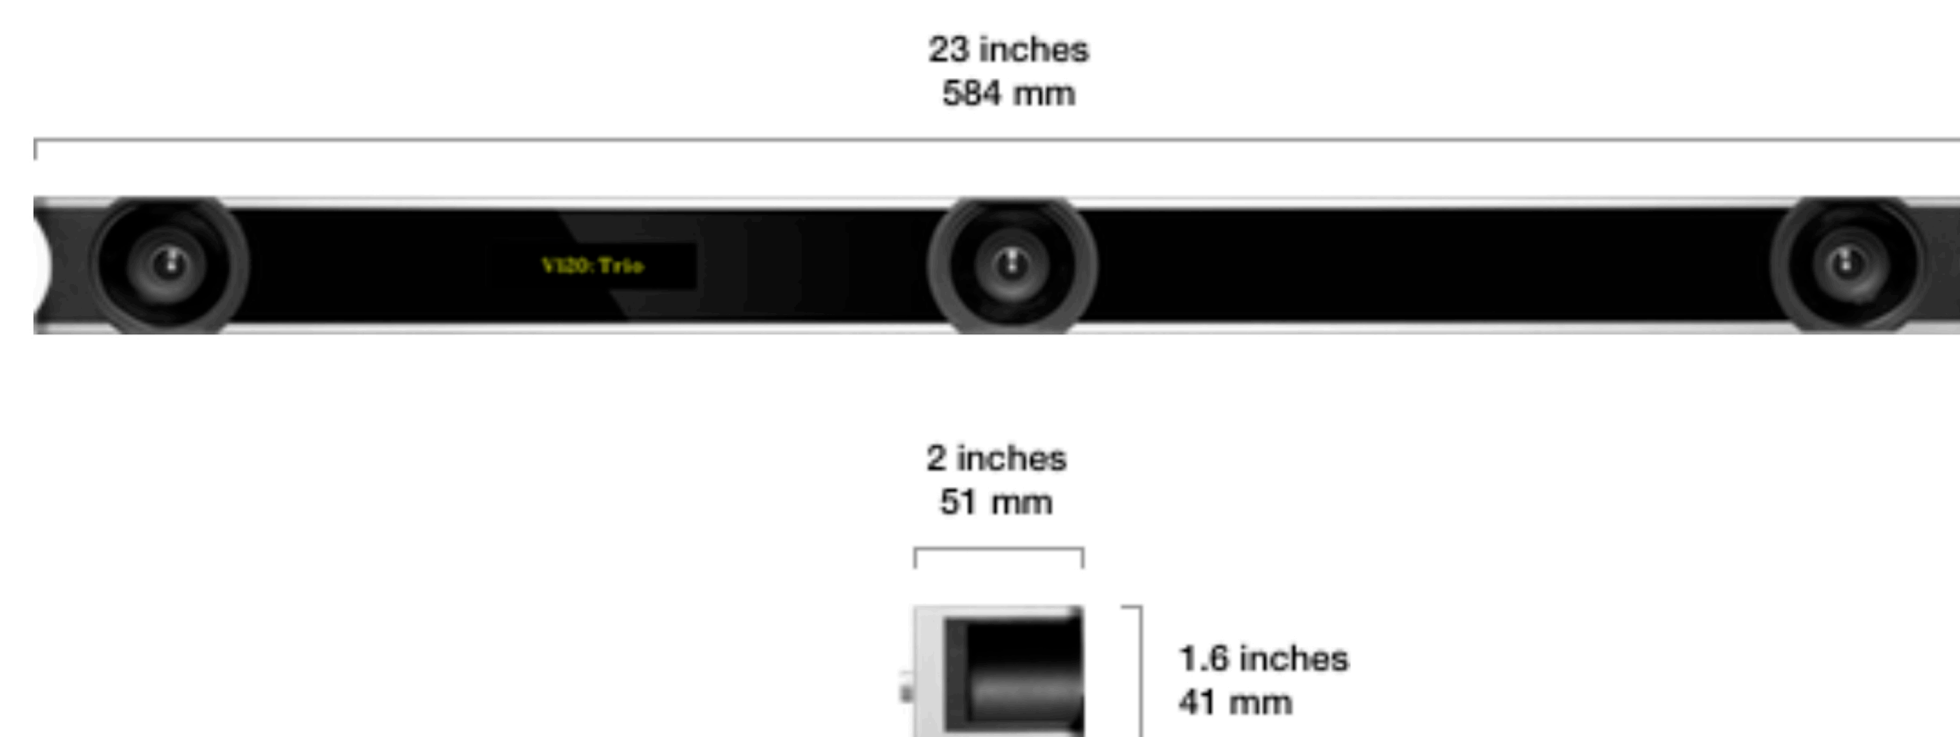

**Width**

23 inches (58.52 cm)

**Height**

1.6 inches (4.06 cm)

**Depth**

2 inches (5.08 cm)

**Weight**

2.8 pounds (1.3 kg)

**Camera Body**

Aluminum

1/4"-20 Standard  
Tripod Mount

128 × 22 OLED  
status indicator

LED health and  
activity indicator